

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

MEDIUM COUNTERTOP, IDEAL FOR PROMOTIONS OR **IMPULSE** NEW PRODUCTS.




KEY FEATURES


- **BMAD refrigeration system**, allow to cool down the interior and maintain the temperature range with a minimum energy consumption.
- **30 gauge exterior pre-painted steel**, brings years of duration.
- **Electronic temperature controller**, assures an optimal performance of the cooler, making the product temperature ideal for its consumption.
- **High efficiency glass door**, with a double panel and a low-e film reduces the condensation. Self closing system allow the door to get back to its original position, taking care not to damage it.
- **LED lighting system**, uses a portion of the energy of regular fluorescent lights, and need no replacement for seven years.
- **CFC and HFC free Cyclopentane foam**, is eco-friendly and a high efficiency insulator.
- **Electronic fan motors**, allow a better performance, using only a portion of the energy required by a shaded pole motor.
- **Low maintenance condenser**, prevents dust from blocking air flow and thus saving energy and increasing compressor's life.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

PRODUCT VIEWS



TOP VIEW

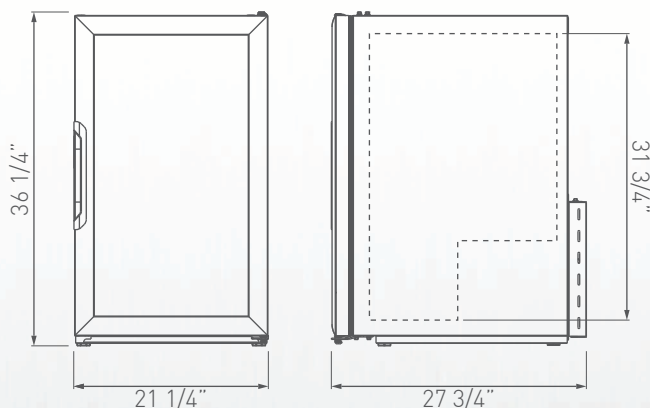

FRONT VIEW

SIDE VIEW

Warranty:

One year limited warranty on all parts and labor, an additional 4 year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

Exterior Dimensions	L:	21 1/4"	540 mm
	D:	27 3/4"	704 mm
	H:	36 1/4"	921 mm

Interior Dimensions	L:	18"	456 mm
	D:	21 3/4"	554 mm
	H:	31 3/4"	807 mm

Shelf Size (small)	L:	17 3/4"	450 mm
	D:	6 1/8"	157 mm

Shelf Size (regular)	L:	17 1/8"	435 mm
	D:	17 3/8"	440 mm

Weight	126.8 Lbs	57.5 Kg
---------------	-----------	---------

Shelves	3
----------------	---

Capacity 20oz.	Flat:	84
-----------------------	--------------	----

REFRIGERATION DATA

Energy Consumption	1.740 kWh/day
---------------------------	---------------

Voltage	115/60
----------------	--------

Horse Power	1/8
--------------------	-----

AMPS	2.5
-------------	-----

LOGISTIC

Trailer Loads	40':	120
	53':	160

Certifications	UL:	✓
	ES:	✓
	EPH/NSF:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.