

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

XTREME SUPER COLD LINE DESIGNED TO REDUCE BEVERAGE TEMPERATURE BELOW FREEZING FOR THE OPTIMAL ICY-COLD REFRESHMENT EXPERIENCE

NEW DOE 2017
regulatory compliant model for ultimate efficiency




KEY FEATURES



- **Average 24.8°F, for Optimal Ice Cold Refreshments**
2 inch high LED temperature display for maximum consumer appeal and impact.



- **Eco-Friendly Refrigerant R290**
New R290 alternative, HFC-free refrigerant gas that reduces environmental impact. (New DOE 2017 regulatory standards)



- **Low Maintenance Condenser**
Designed to reduce dust & debris accumulation, which significantly reduces service frequency and run time. Delivers lowest ongoing energy consumption and guarantees refrigeration system longevity.



- **Electronic Temperature Controller**
Patented CIF electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



- **Electronic Fan Motors**
Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



- **High Efficiency Glass Door**
Equipped with double/triple panel glass and low e-film to reduce condensation. Safety glass external door pane. Lightweight Plastic doorframe design. Self-closing door hinge. Zero profile pocket handle.



- **LED Lighting System**
LED uses a fraction of the energy of regular florescent lights and requires no replacement for up to seven years. Imbera standard modular standard design, with multiple 1' LED modules, allows for efficient replacement or upgrade to new bright LED options and are backward compatible to 2008.



- **CFC and HFC Free Cyclopentane Foam**
Eco-friendly, recyclable and high efficiency cabinet insulation.




- **Plastic Front Grill**
Standard lightweight plastic grill in unique, modern design. Provides superior impact resistance and is easy to remove for maintenance

CERTIFICATIONS




ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

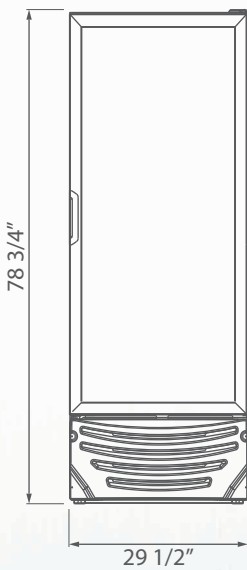

FRONT VIEW

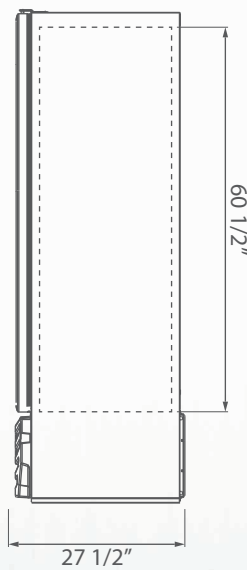

SIDE VIEW

Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.



CAUTION. Risk of fire or explosion.
This equipment uses highly flammable refrigerant HC. Do not drill pipe cooling system.

Customer Service: 866-548-5770 | WWW.IMBERAFOODSERVICE.COM

Operators should only stock beverages and packages in xtreme freezer that are safe to operate below freezing temperatures. Operators are wholly responsible for all safety and product integrity when storing liquid products in a freezer.

Three year limited warranty is included on all parts and labor. An additional two year warranty is issued on the compressor (USA & Canada only).

Operators must follow installation and operational guidelines per Imbera Users Manual. Each cooler must have its own power supply, otherwise warranty will be void.

TECHNICAL SPECIFICATIONS

Exterior Dimensions

H:	78 3/4"	2000 mm
W:	29 1/2"	750 mm
D:	27 1/2"	700 mm

Interior Dimensions

H:	60 1/2"	1536 mm
W:	25 1/2"	649 mm
D:	21 3/8"	542 mm

Usable Interior Capacity

H:	54"	1371 mm
W:	25 1/2"	649 mm
D:	21 3/8"	542 mm

Usable Volume

17.030 ft ³
482.26 lts

Capacity 12 oz. Bottle

Flat: 280

Doors

1

Doors Construction

Standard Black Plastic Frame

Shelves

5

Shelf Size & Guage

W:	24 3/4"	630 mm
D:	19 5/8"	497 mm

REFRIGERATION PERFORMANCE DATA

Refrigerant R290

0.075 kg

Energy Consumption

2.021 kWh/day*

Compressor Power

1/3 HP
314 watts

Condenser

Finless, (low maintenance)

Thermostat Setting

Default

Cut-Out

24.8°F (-4°C)

Cut-In

32°F (0°C)

ELECTRICAL DATA

Power Supply

115v 60 Hz

AMPS

6.9 kWh/day

Cord Length

118'
3000mm

Lighting

220 Lux output
8 modules
6 LED per module

Plug Type

PC-731

Controller

Imbera ETC1H controller
Pre-programmed temperatures

LOGISTIC DATA

Trailer Loads

53':	60
40':	42

Unit Weight w/packaging

240.4 Lbs
109.1 kg

Dimensions w/packaging

H:	82 5/8"	2100 mm
W:	32 1/4"	820 mm
D:	29 7/8"	760 mm

*Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.